

## CFM/CMM Thermo-Anemometer + IR Thermometer

**Large display of Airflow or Air Velocity**  
Plus model with built-in InfraRed Thermometer

### Features:


- Model AN100 — CFM/CMM Thermo-Anemometer
- Model AN200 — CFM/CMM Thermo- Anemometer with built-in non-contact IR Thermometer measures remote surface temperatures to 500°F (260°C) with an 8:1 distance-to-spot ratio and Laser Pointer
- Simultaneous display of Ambient Temperature and Air Flow or Air Velocity
- Up to 8 easy to set Area dimensions (ft<sup>2</sup> or m<sup>2</sup>) are stored in the meter's internal memory
- 20 point average function for Air Flow
- Super large LCD Backlit Display
- 3% velocity accuracy via low friction 2.83"D (72mm) ball bearing vane wheel on 3.9ft (120cm) cable
- Data Hold and MIN/MAX
- Auto Power off
- Complete with vane sensor with 3.9ft (120cm) cable, 9V battery, protective rubber holster, and carrying case

### Applications:

- HVAC installation, repair, diagnostics, and optimization.
- Fume hood testing, installation, and verification
- Ventilation system installation, servicing, and analysis
- Environmental wind and temperature testing/analysis
- Boiler rooms
- Ionizer flow output monitoring
- Automobile aerodynamic testing
- Plant/Facilities Maintenance



**BUILT IN IR**  
**Thermometer**   
Patented

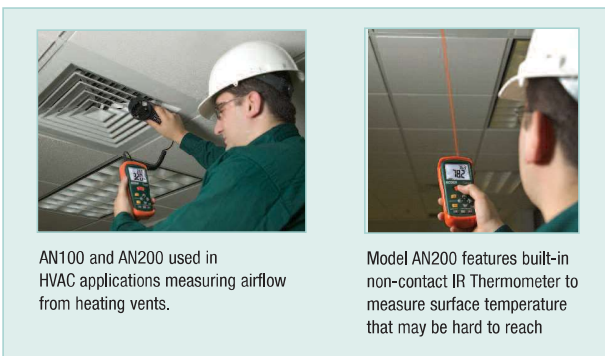

AN100 and AN200 used in HVAC applications measuring airflow from heating vents.

Model AN200 features built-in non-contact IR Thermometer to measure surface temperature that may be hard to reach

Specifications	Range	Resolution	Basic Accuracy
Air Velocity	0,40 to 30,00 m/s	0,01 m/s	±3% m/s
	1,4 to 108,0 km/h	0,1 km/h	±3% km/h
	80 to 5906 ft/min	1 ft/min	±3% ft/min
	0,9 to 67,2 mph	0,1 mph	±3% mph
	0,8 to 58,3 knots	0,1 knots	±3% knots
Air Temperature	14 to 140°F (-10 to 60°C)	0,1°F/°C	±6,0°F (3°C)
InfraRed Temperature (AN200 Only)	-58 to -4°F (-50 to -20°C)	0,1°F/°C	±9,0°F (5,0°C)
	-4 to 500°F (-20 to 260°C)	1°F/°C	±2% reading or ±2°F (°C) whichever is greater
Airflow	0 to 9999 CMM (m <sup>3</sup> /min)	0,1	
	0 to 9999 CFM (ft <sup>3</sup> /min)	0,1	
	0 to 999,999 CMM (m <sup>3</sup> /min)	0,1	
	0 to 999,999 CFM (ft <sup>3</sup> /min)	0,1	
Dimensions/Weight	7 x 2,9 x 1,3" (178 x 74 x 33mm)/1,6lbs (700g)		

### Ordering Information:

- AN100 .....CFM/CMM Thermo-Anemometer  
 AN100-NIST .....CFM/CMM Thermo-Anemometer w/ Calibration Traceable to NIST  
 AN200 .....CFM/CMM Thermo-Anemometer + IR Thermometer  
 AN200-NIST .....CFM/CMM Thermo-Anemometer + IR Thermometer w/ Calibration Traceable to NIST